

# PolyTherm® 300-3.4 D

PHARMACY • MANUFACTURING • FOOD PACKAGING • WAREHOUSING

A topcoated, synthetic thermal label facestock with high durability and resistance properties.

## SYNTHETIC LABEL FACESTOCK



### Key Features

- Lightweight, synthetic base (polypropylene film)
- High durability
- Water resistance
- Environmental resistance
- Dark image

### Applications

- Airline baggage tags
- Retail shelf labels
- Product labeling
- Industrial labels
- Parking violations
- Ski lift tickets
- Pharmaceutical labels

Use of Appvion's thermal products in processing, equipment, end-use or other applications for which they were not intended voids all warranties.

\*Data listed are preliminary values based on initial production. Final values will be published at a later date.

Publication Date: December 2018 © 2018 Appvion Operations, Inc. Data is for reference only. May be subject to alterations.



## PRODUCT CHARACTERISTICS

### \*PRELIMINARY DATA

Caliper (mils/μm)	3.40 ± 0.35/86.4 ± 9
Basis Weight	
17 x 22–500 (lbs)	16.2 ± 1.0
g/m <sup>2</sup>	60.0 ± 3.0

Thermal Response - Nominal	
<b>Static</b> (°C ± 5°)	
0.2 ODU	75
1.0 ODU	91
Maximum Density (ODU)	2.33
Temperature Required	148
<b>Dynamic</b> –Atlantek 400 (mJ/mm <sup>2</sup> )	
0.2 ODU	7.0
1.0 ODU	9.2
Maximum Density (ODU)	2.20
Energy Required	14.6

Brightness (UV Included)	>90
Gurley Stiffness Nominal (mg)	MD 39
	CD 53
Elmendorf Tear Nominal (g)	MD 33
	CD 30
Parker Print Smoothness	<1.50

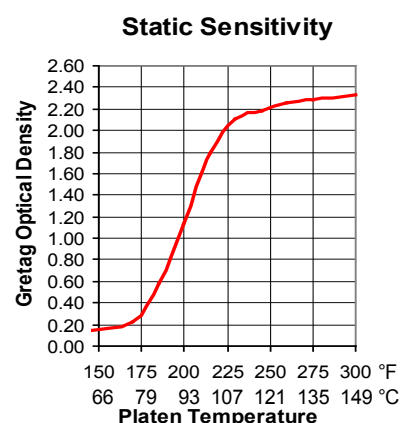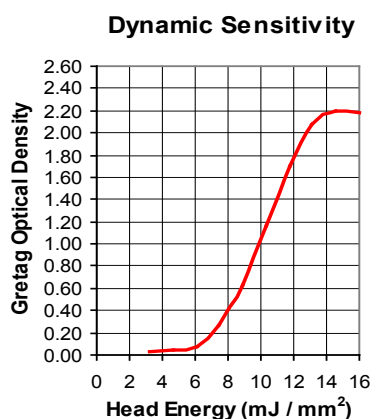

# APPVION