

# PolyTherm<sup>®</sup> 200-3.8

PHARMACY • MANUFACTURING • FOOD PACKAGING • WAREHOUSING

A topcoated, synthetic thermal label facestock with exceptional smoothness and resistance.

## SYNTHETIC LABEL FACESTOCK



## Key Features

- Synthetic base (polypropylene film)
- High durability
- Water resistance
- Environmental resistance
- Dark image

## Applications

- Retail shelf labels
- Airline baggage tags
- Industrial labels
- Parking violations
- Pharmaceutical labels
- Ski lift tickets

Use of Appvion's thermal products in processing, equipment, end-use or other applications for which they were not intended voids all warranties.



Publication Date: June 2018 © 2018 Appvion Operations, Inc.  
Data is for reference only. May be subject to alterations.

## PRODUCT CHARACTERISTICS

Caliper (mils/μm)	3.9 ± 0.4/99.1 ± 11
Basis Weight	
17 x 22–500 (lbs)	21.1 ± 1.1
g/m <sup>2</sup>	79.3 ± 4.0

Thermal Response - Nominal	
<b>Static</b> (°C ± 5°)	
0.2 ODU	86
1.0 ODU	103
Maximum Density (ODU)	2.10
Temperature Required	126
<b>Dynamic</b> –Atlantek 400 (mJ/mm <sup>2</sup> )	
0.2 ODU	8.8
1.0 ODU	12.5
Maximum Density (ODU)	2.00
Energy Required	16.0

Brightness (UV Included)	>90
Gurley Stiffness Nominal (mg)	MD 79
	CD 120
Elmendorf Tear Nominal (g)	MD 44
	CD 37
Parker Print Smoothness	<1.10

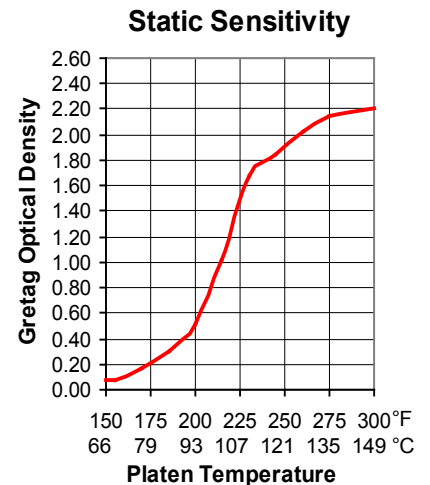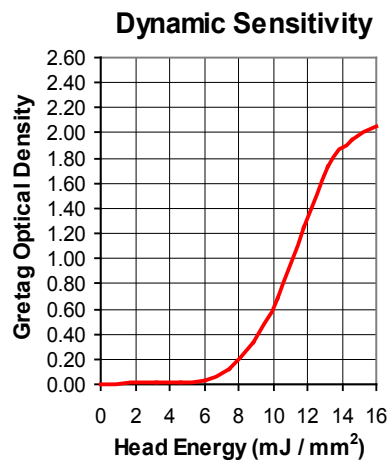

# APPVION