

# PolyTherm® 300-4.1

PHARMACY • MANUFACTURING • FOOD PACKAGING • WAREHOUSING

A topcoated, synthetic thermal label facestock with exceptional smoothness and resistance.

## SYNTHETIC LABEL FACESTOCK



### Key Features

- Synthetic base (polypropylene film)
- High durability
- Water resistance
- Environmental resistance
- Dark image

### Applications

- Airline baggage tags
- Retail shelf labels
- Product labeling
- Industrial labels
- Parking violations
- Ski lift tickets
- Pharmaceutical labels
- Exterior document

Use of Appvion's thermal products in processing, equipment, end-use or other applications for which they were not intended voids all warranties.



Publication Date: June 2018 © 2018 Appvion Operations, Inc. Data is for reference only. May be subject to alterations.

## PRODUCT CHARACTERISTICS

Caliper (mils/μm)	4.1 ± 0.4-0.3/104 ± 10
Basis Weight	
17 x 22-500 (lbs)	21.9 ± 1.1
g/m <sup>2</sup>	82.1 ± 4.0/-4.2

Thermal Response - Nominal	
<b>Static</b> (°C ± 5°)	
0.2 ODU	76
1.0 ODU	97
Maximum Density (ODU)	2.46
Temperature Required	135
<b>Dynamic</b> -Atlantek 400 (mJ/mm <sup>2</sup> )	
0.2 ODU	7.7
1.0 ODU	10.9
Maximum Density (ODU)	2.14
Energy Required	16.0

Brightness (UV Included)	> 90
Gurley Stiffness Nominal (mg)	MD 95 CD 128
Elmendorf Tear Nominal (g)	MD 39 CD 30
Parker Print Smoothness	<1.50

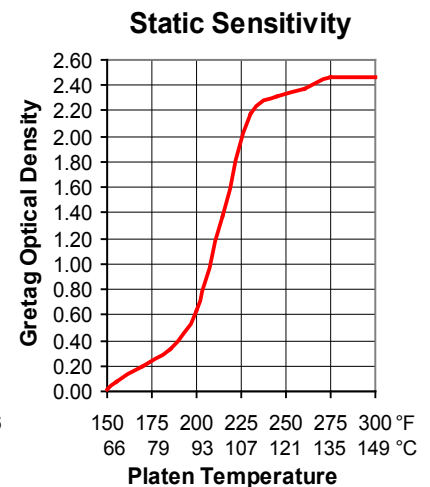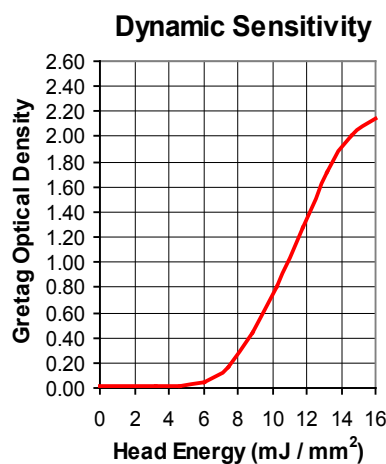

APPVION