

# Alpha<sup>®</sup> 800-2.4

RESEARCH LABORATORIES • HOSPITALS • TESTING FACILITIES • OFFICES

This 800-sensitivity, point-of-sale and facsimile grade has excellent bar code and graphics imaging. Suited for flexographic printing on front and back. Produced without the use of bisphenol A (BPA) since 2006.

## SCIENTIFIC & OFFICE PRODUCTS



## Key Features

- 800-sensitivity
- Excellent graphics and bar code imaging
- Bright white appearance
- Flexographic printable front and back
- Lithographic printable back side only
- BPA Free

## Applications

- Point-of-sale receipts
- ATM receipts
- Kiosks
- Parking receipts
- Airline check-in kiosks
- High speed facsimile
- Charting
- Portable receipts

Use of Appvion's thermal products in processing, equipment, end-use or other applications for which they were not intended voids all warranties.



Publication Date: June 2018 © 2018 Appvion Operations, Inc.  
Data is for reference only. May be subject to alterations.

## PRODUCT CHARACTERISTICS

Caliper (mils/μm)	2.40 ± 0.15/61 ± 5
Basis Weight	
17 x 22–500 (lbs)	13.6 ± 0.7
g/m <sup>2</sup>	51.1 ± 2.7

Thermal Response - Nominal	
<b>Static</b> (°C ± 5°)	
0.2 ODU	84
1.0 ODU	133
Maximum Density (ODU)	1.32
Temperature Required	148
<b>Dynamic</b> –Atlantek 400 (mJ/mm <sup>2</sup> )	
0.2 ODU	4.6
1.0 ODU	7.4
Maximum Density (ODU)	1.82
Energy Required	13.1

Brightness (UV Included)	>85
Gurley Stiffness Nominal (mg)	MD 28 CD 15
Elmendorf Tear Nominal (g)	MD 31 CD 35
Parker Print Surf	<1.90

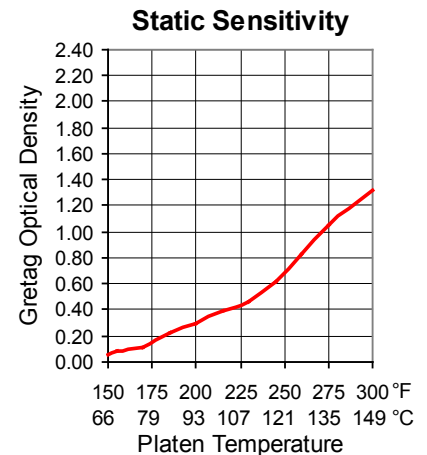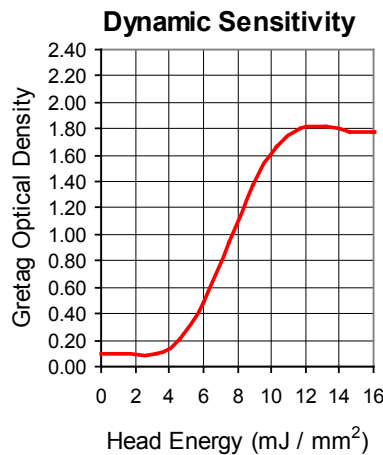

APPVION