

Résiste® LLE X

Label Facestock



Résiste® LLE X is a topcoated direct thermal label facestock purpose-built for linerless labeling applications. With exceptional coating adhesion, it delivers reliable performance in demanding environments, ensuring labels stay put without the need for a liner, reducing waste and improving operational efficiency.

Key Features

- Made with our EarthChem™ chemistry with no added phenols
- Linerless design eliminates the need for release liners, reducing waste and simplifying operations
- Strong coating adhesion ensures dependable performance and durability in challenging environments
- High imaging speed supports printing up to 10 inches per second for fast and efficient throughput

Applications

- Quick Service Restaurants (QSR)
- Distribution Labels
- Retail Labels


MADE IN USA




Product Characteristics — Preliminary Data

Caliper	3.2 ± 0.2/81.3 ± 5
Basis Weight	18.6 ± 0.9 69.9 ± 3.5
Thermal Response - Nominal	
Static (°C ± 5°)	
Initial 0.2 ODU	110° C
Functional 1.0 ODU	130° C
Maximum 1.5 ODU	149° C
Dynamic—Atlantek 400 (mJ/mm²)	
Initial 0.2 ODU	6.3
Functional 1.0 ODU	9.1
Maximum 1.8 ODU	16
Brightness (UV Included)	>85
Gurley Stiffness Nominal (mg)	MD 90 CD 40
Elmendorf Tear Nominal (g)	MD 50 CD 50
Tensile (lbs/in)	MD 35 CD 17
Parker Print Surface	<1.5

Dynamic Sensitivity

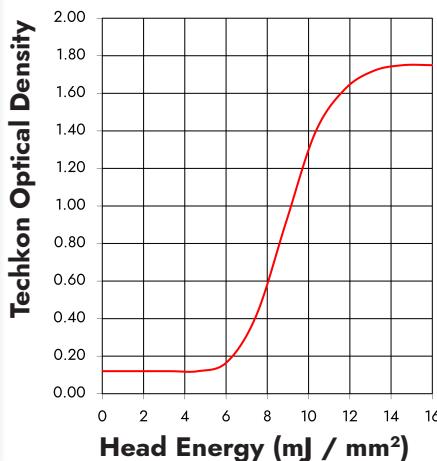

Static Sensitivity

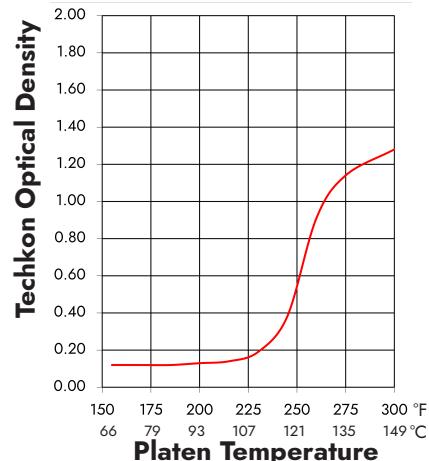

©2026 Appvion, LLC. Data is for reference only. May be subject to alterations. Use of Appvion's direct thermal products in processing, equipment, end-use, or other applications for which they were not intended voids all warranties.



APPVION

Appvion, LLC · 825 East Wisconsin Avenue · Appleton, Wisconsin 54912 · (877) 768 – 8399 · appvion.com